

# LITHIONICS BATTERY®

LITHIUM ION IRON PHOSPHATE BATTERY SYSTEMS



MODEL NUMBER:  
GT12V450A-F24-DIN-MODULE-UL

EXTERNAL BMS  
VERSION




**EXTERNAL BMS REQUIRED**

**BMS SOLD SEPARATELY. SEE BMS DATA SHEET PROVIDED BY LITHIONICS BATTERY®.**

Item	Description
Model	GT12V450A-F24-DIN-MODULE-UL
Nominal Voltage	12.8
Nominal Capacity	450
Nominal Watt Hours	5760
Internal Resistance	<300 milliohms
<b>Charge</b>	
Charging temperature range	32F/0C to 113F/45C
Charge voltage	14.6
Recommended float charge voltage(for standby use)	13.4
Recommended max charge current*	225
Allowed max charge current*	400
<b>Discharge</b>	
Discharging temperature range	-4F/-20C to 131F/55C
Operating Voltage Range	11.6 to 13.4
Recommended max discharge current*	400
Max discharge current*	400
Pulse discharge current	4500
Discharge cut-off voltage	NeverDie® Power Reserve @ 12.00 Low-Voltage Cut-Off @11.60
<b>Mechanical</b>	
Dimensions	Length 24" Width 13" Height 11.22"
Weight	Approx. 130lbs (58.9kg)
<b>Storage</b>	
Storage Temperature & Humidity Range	< 1 Month -4~95°F (-20~35°C), 45~75%RH < 3 Months 14~86°F (-10~30°C), 45~75%RH Recommended storage 59~95°F (15~35°C), 45%RH~75%RH
Long Term Storage	If the battery needs to be stored for > 3 months the voltage should be 13.2V (50%SOC), and stored at the recommended storage specifications shown above. Additionally, the battery needs at least one charge & discharge cycle every six months.
Self-discharge rate	Residual capacity ≤3% per month; ≤15% per year Reversible capacity ≤1.5%per month; ≤8% per year

\* Maximum charging and discharging rates apply depending upon the ambient temperature and duty cycle of the system. UL1973 tests of maximum charge and discharge current were performed at 25°C/77°F

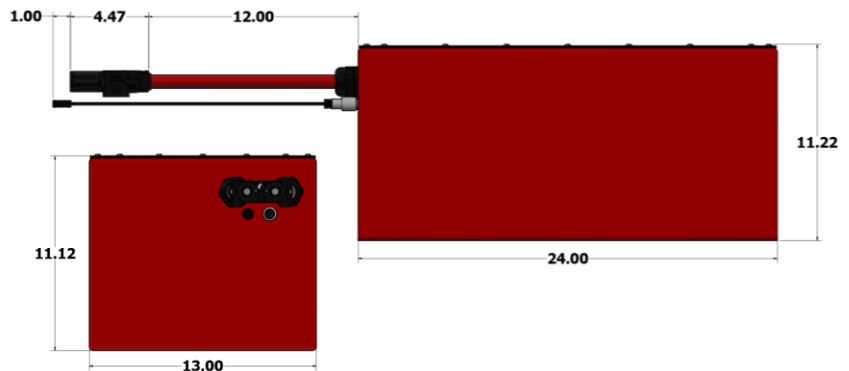

## NEVERDIE®

ENERGY

**450 AMP HOURS**

**PULSE AMPS: 4500 (1SEC)**

**5760 WATT-HOURS**

**WARNING**

1. LITHIUM BATTERIES ARE NOT DESIGNED FOR CHARGING IN SUB-FREEZING TEMPERATURES. CONTACT LITHIONICS BATTERY® FOR DETAILS ON OUR COLD WEATHER PACKAGE.
2. INSTALLATION: IT IS RECOMMENDED THAT BATTERIES BE INSTALLED CABLE OR TERMINAL SIDE UP.

NOTE: CONTACT LITHIONICS BATTERY® FOR A USER INSTALLATION GUIDE & STORAGE PROCEDURES. FOLLOW THE GUIDE TO ENSURE FITNESS OF USE & WARRANTY.

**12V**  
GT  
**SERIES**